




PROFESSIONAL SPEAKER



系列  
series

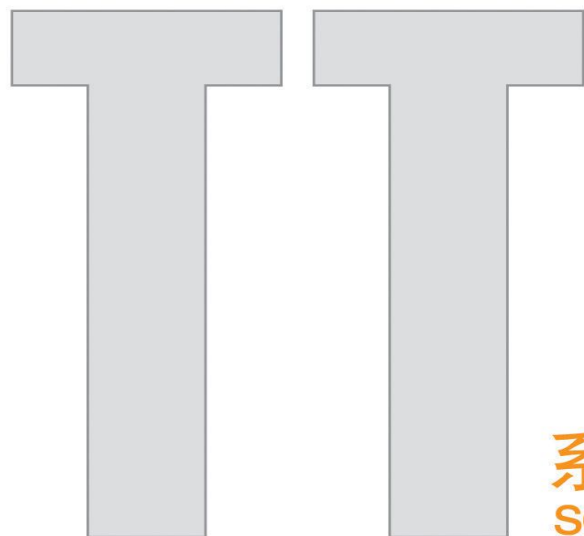


TT系列是一套适合顶级会所、别墅、高档KTV的音箱。音箱外观设计新颖，耐看，运用多边形不对称的声学技术，配以意大利高级专业单元，可变成不同场合的使用要求，满足高级配置的需要。箱体全使用多层优质夹板、号角旋转设计。

TT series are the speakers suitable for top club, villa, high-grade KTV. The appearance design is novel, use multilateral type asymmetric acoustic technology, match with Italy senior professional units, can be turned into different situations use the requirements to meet the needs of the advanced configuration. The cabinet use good quality plywood, horn rotary design.



## TT-12<sup>+</sup>

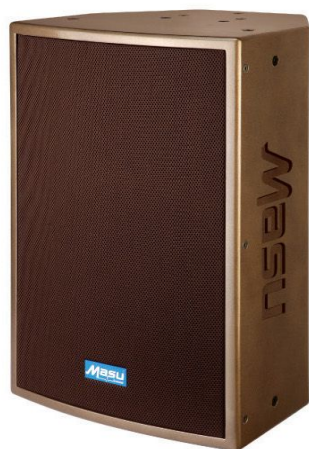

### 结构特性:

TT-12<sup>+</sup> 音箱，多用途，两分频，系统覆盖 90° x 50° 的声音范围，整个扬声器系统提供极佳的声音还原效果，尤其可满足追求自然、高清晰度的场所使用，人声圆滑，中频醇厚，是这款音箱的一大亮点。

### 电性能参数 Electrical performance parameter

频响范围(±10dB) Frequency response (±10dB)	43Hz -20 KHz
声压灵敏度(1瓦.1米) Pressure sensitivity(1 watt.1 m)	100 dB SPL
最大连续声压级 Maximum continuous sound pressure level	126 dB SPL
峰值声压值 Peak sound pressure level	128 dB SPL
输入阻抗 Input impedance	8 ohm
覆盖角度(HxV) -6dB Coverage Angle (HxV) -6dB	水平: 90° 垂直: 50° Horizontal: 90° Vertical: 50°
额定输出功率 Rated output power	500 W
峰值输出功率 Peak output power	1000 W
低频 Woofer	1x 12 英寸 RCF 精密低频换能器 1x 12 inch RCF precision woofer transducer
高频 High Frequency Driver	1x 1.75 英寸 B&C 精密高频驱动器 1x 1.75 inch B&C precision high frequency driver
低频 Woofer Size	75mm
高频 High Frequency Driver Size	44mm

### Structural Features:

TT-12<sup>+</sup> is a multi-purpose and 2 ways speaker, the system covering 90° x 50° voice range, the speaker

system to provide excellent sound reduction effect, especially can meet the natural request, smooth sound and intermediate frequency

### 结构和特性 Structure and characteristics

箱体 BOX	内部加固的18mm 厚桦木多层板 Interior reinforced 18 mm thick birch plywood
连接器 Connectors	2 只 4 针 PA-COM 插座 2 Pcs 4 -hole PA-COM plugs
箱体表面处理 Cabinet surface	标准色为闪金, 6层闪金, 光面漆覆盖 standard colour is TwinkLing golden, 6 layer flash gold, glaze lacquer Covers
保护格栅 Protective grille	1.5mm 厚的透声孔钢板 1.5mm Thick sound-transparent holes steel plate
体积 (宽x深x高) Dimensions (WxDxH)	375mm x 360mm x 582mm
重量 weight	23公斤 23kg


is full-bodied, this is a major bright point for this speaker.





PROFESSIONAL SPEAKER

# TT-15<sup>+</sup>

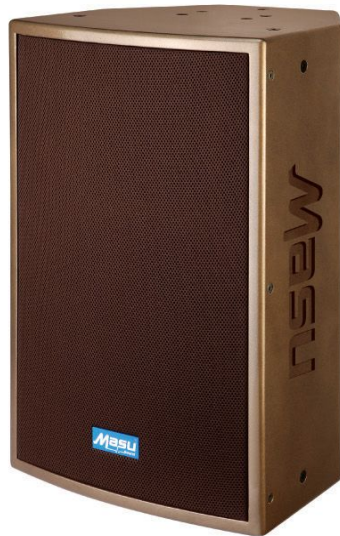

### 结构特性:

TT-15<sup>+</sup>型音箱是一款两分频音箱，由一个15寸低频单元和一个高频压缩器组合，它拥有超平滑的高频与结实的低频响应耦合，产生十分完美的音色，由于采用了多边不对称箱体技术，可以单独使用在没有超低音应用场合，提供饱满和低下潜度的低频效果。可以在不同的场所：演艺、会所、高级KTV中发挥出色。

### 电性能参数 Electrical performance parameter

频响范围(±10dB) Frequency response (±10dB)	38 Hz -20 KHz
声压灵敏度(1瓦.1米) Pressure sensitivity(1 watt.1 m)	102 dB SPL
最大连续声压级 Maximum continuous sound pressure level	128 dB SPL
峰值声压值 Peak sound pressure level	130 dB SPL
输入阻抗 Input impedance	8 ohm
覆盖角度(HxV) -6dB Coverage Angle (HxV) -6dB	水平: 90° 垂直: 50°, Horizontal: 90° Vertical: 50°
额定输出功率 Rated output power	650 W
峰值输出功率 Peak output power	1300 W
低频 Woofer	1x 15 英寸B&C精密低频换能器 1x 15 inch B&C precision woofer transducer
高频 High Frequency Driver	1x 2.5 英寸B&C精密高频驱动器 1x 2.5 inch B&C precision high frequency driver
低频 Woofer Size	75mm
高频 High Frequency Driver Size	65mm

### Structural Features:

TT-15<sup>+</sup> is a 2 ways speaker, there is a 15 inches of woofer unit and a tweeter driver combination, it has

super smooth high frequency and low frequency response, produce perfect tone, as a result of the multilateral asymmetric cabinet

### 结构和特性 Structure and characteristics

箱体 BOX	内部加强的18mm 厚桦木多层板 Interior reinforced 18 mm thick birch plywood
连接器 Connectors	2 只 4 针PA-COM插座 2 Pcs 4 -hole PA-COM plugs
箱体表面处理 Cabinet surface	标准色为闪金, 6层闪金, 光面漆覆盖 standard color is TwinklIng golden, 6 layer flash gold, glaze lacquer Covers
保护格栅 Protective grille	1.5mm 厚的透声孔钢板 1.5mm Thick sound-transparent holes steel plate
体积 (宽x深x高) Dimensions (WxDxH)	445mm x 410mm x 710mm
重量 weight	32公斤 32kg

technology, can be used alone. It can provide full and low submergence degree low frequency effect even no subwoofer. Can be

use in different places: acting, club, KTV senior play well.

